


## XL-10

### Multi-Pin Breakout Cable for 442 Mixer

The XL-10 multi-pin breakout cable provides quick, convenient access to the 442 mixer's multi-pin audio connector. The XL-10 extends the mixer's multi-pin connection and provides separate, balanced XLR outputs (left and right) plus the Return-A send to the 442. It can be used with cameras or recorders to provide a single cable carrying multiple signals.

The XL-10 consists of two pieces, the breakout segment and the Hirose-to-Hirose extension cable. The breakout segment can be used independent of the extension segment for applications where short cable runs are feasible.

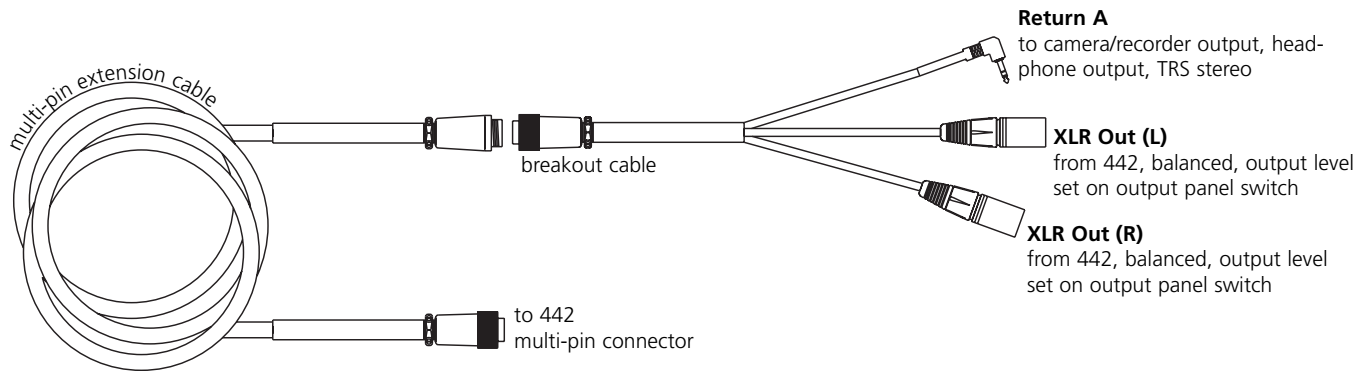


### Operational Notes

- The XL-10 can be used with and without the extension cable.
- Additional microphone cable can be connected to the individual XLR connectors on the breakout cable. Use high-quality microphone cable when extending the XLR lengths.
- The Return-A segment is unbalanced.
- Additional length segments of extension cable can be added for long cable runs (contact Sound Devices for extension cable suppliers).

#### Specifications

<b>Connectors:</b>	Hirose 10-pin male (2), Hirose 10-pin female (1), Neutrik XLR-M (2), 3.5 mm TRS right-angle (1)
<b>XLR Outputs:</b>	Neutrik XLR-M, pin-2 (+), pin-3 (-), pin-1 (ground)
<b>Return A:</b>	3.5 mm, unbalanced, tip-left, ring-right, sleeve- ground
<b>Length:</b>	XLR breakout - 61 cm, 24 inch (3.5 mm 66 cm, 26 inch) extension - 610 cm, 20 ft
<b>Cable Type:</b>	Belden 1904A

#### 442 Multi-Pin Outputs



- 1 . . . . .L (+) output
- 2 . . . . .L (-) output
- 3 . . . . .R (+) output
- 4 . . . . .R (-) output
- 5 . . . . .R (+) return A
- 6 . . . . .n/c
- 7 . . . . .L (+) return A
- 8 . . . . .n/c
- 9 . . . . .ground
- 10 . . . . .ground

### SOUND DEVICES, LLC

300 Wengel Drive • Reedsburg, WI 53959 • USA • phone: (608) 524-0625 • fax: (608) 524-0655 • [www.sounddevices.com](http://www.sounddevices.com)